



# CD 269L HL Series



2000 ~5000h at 125°C

- Load life of 2000~ 5000 hours at 125°C
- High Reliability at High Temperature
- Automotive
- Professional Long-Life Applications

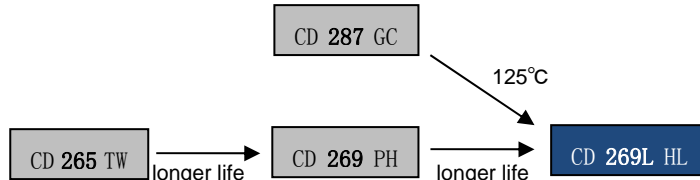


Items	Characteristics																								
Operating Temperature Range(°C)	-40 ~ +125																								
Voltage Range (V)	10~ 100																								
Capacitance Range(μF)	1 ~ 4700																								
Capacitance Tolerance (20°C,120Hz)	±20%																								
Leakage Current (μA)	After 1 minutes at 20°C application of rated voltage, leakage current is not more than 0.03CV or 4, whichever is greater C:Nominal Capacitance(μF) V:Rated Voltage(V)																								
Dissipation Factor (20°C, 120Hz)	<table border="1"> <thead> <tr> <th>WV(V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Tan δ(max)</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> </tr> </tbody> </table> <p>For Capacitances&gt;1000μF add 0.02 to every 1000μF</p>	WV(V)	10	16	25	35	50	63	100	Tan δ(max)	0.20	0.16	0.14	0.12	0.10	0.09	0.08								
WV(V)	10	16	25	35	50	63	100																		
Tan δ(max)	0.20	0.16	0.14	0.12	0.10	0.09	0.08																		
Stability at Low Temperature (Impedance Ratio at 120Hz)	<table border="1"> <thead> <tr> <th>Rated Voltage(V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Z<sub>25°C/+20°C</sub></td> <td>3</td> <td colspan="6">2</td> </tr> <tr> <td>Z<sub>40°C/+20°C</sub></td> <td>6</td> <td colspan="6">4</td> </tr> </tbody> </table>	Rated Voltage(V)	10	16	25	35	50	63	100	Z <sub>25°C/+20°C</sub>	3	2						Z <sub>40°C/+20°C</sub>	6	4					
Rated Voltage(V)	10	16	25	35	50	63	100																		
Z <sub>25°C/+20°C</sub>	3	2																							
Z <sub>40°C/+20°C</sub>	6	4																							

	Useful Life		Load Life	Endurance Test	Shelf Life
Lifetime	φ 8 :4000h φ 10 :6000h φ ≥12.5:10000h	≥180000h	φ 8 :2000h φ 10 :3000h φ ≥12.5 :5000h	φ 8 :3000h φ 10 :5000h φ ≥12.5 :7000h	1000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ±50% of initial value		Within ±30% of initial value	Within ±30% of initial value	Within ±30% of initial value
Dissipation Factor	Not more than 500% of specified value		Not more than 300% of specified value	Not more than 300% of specified value	Not more than 300% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	U <sub>R</sub> I <sub>R</sub> 125°C	U <sub>R</sub> 1.4 x I <sub>R</sub> 60°C	U <sub>R</sub> I <sub>R</sub> 125°C	U <sub>R</sub> I <sub>R</sub> = 0 125°C	U <sub>R</sub> = 0 I <sub>R</sub> = 0 125°C  After test: U <sub>R</sub> to be applied for 30min>24h before measurement

## Dimensions

mm

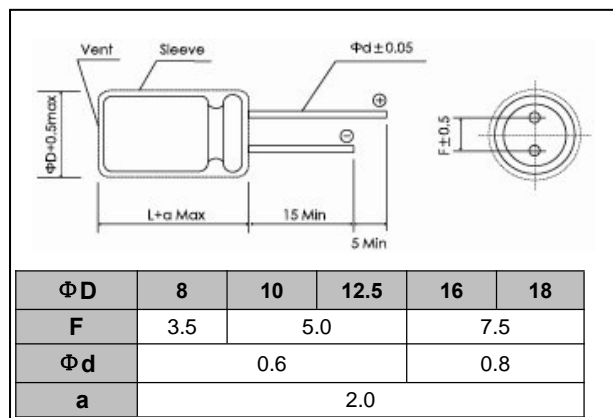

## Frequency Coefficient

Frequency		50/60Hz	120-HZ	500Hz	1kHz	100kHz
Coefficient	1~4.7	0.35	0.42	0.60	0.80	1.00
	10~33	0.45	0.55	0.75	0.90	1.00
	47~330	0.60	0.70	0.85	0.95	1.00
	470~1500	0.65	0.75	0.90	0.98	1.00
	2200~4700	0.75	0.80	0.95	1.00	1.00

## Temperature Coefficient

Temperature(°C)	+65	+85	+105	+125
Coefficient	2.2	2.0	1.7	1.0

## Ratings for CD 269L HL Series


U <sub>R</sub> (Surge Voltage) Code	Rated Capacitance	Max ESR 20°C, 120Hz	Max Impedance 20°C, 100kHz	Rated Ripple Current 125°C, 100kHz	Size ΦD×L	P/N
(V)	(μF)	(Ω)	(Ω)	(mArms)	(mm)	-
<b>10</b> (13) <b>1A</b>	330	0.804	0.22	360	8×11.5	ECR1AHL331M□□080011
	470	0.565	0.15	620	10×12.5	ECR1AHL471M□□100012
	1000	0.265	0.073	960	10×20	ECR1AHL102M□□100020
	2200	0.133	0.040	1430	12.5×25	ECR1AHL222M□□125025
	3300	0.097	0.038	1900	16×25	ECR1AHL332M□□160025
	4700	0.073	0.034	2300	16×31.5	ECR1AHL472M□□160031
<b>16</b> (20) <b>1C</b>	330	0.643	0.22	360	8×11.5	ECR1CHL331M□□080011
	470	0.452	0.15	620	10×12.5	ECR1CHL471M□□100012
	1000	0.212	0.073	960	10×20	ECR1CHL102M□□100020
	2200	0.109	0.040	1430	12.5×25	ECR1CHL222M□□125025
	3300	0.080	0.034	2300	16×31.5	ECR1CHL332M□□160031
	4700	0.062	0.031	2550	16×35.5	ECR1CHL472M□□160035
<b>25</b> (32) <b>1E</b>	220	0.844	0.22	360	8×11.5	ECR1EHL221M□□080011
	330	0.563	0.15	620	10×12.5	ECR1EHL331M□□100012
	470	0.395	0.10	800	10×16	ECR1EHL471M□□100016
	1000	0.186	0.055	1100	12.5×20	ECR1EHL102M□□125020
	2200	0.097	0.034	2300	16×31.5	ECR1EHL222M□□160031
	3300	0.072	0.031	2550	16×35.5	ECR1EHL332M□□160035
<b>35</b> (44) <b>1V</b>	100	1.592	0.22	360	8×11.5	ECR1VHL101M□□080011
	220	0.724	0.15	620	10×12.5	ECR1VHL221M□□100012
	330	0.483	0.10	800	10×16	ECR1VHL331M□□100016
	470	0.339	0.073	960	10×20	ECR1VHL471M□□100020
	1000	0.159	0.040	1430	12.5×25	ECR1VHL102M□□125025
	2200	0.084	0.031	2550	16×35.5	ECR1VHL222M□□160035
	3300	0.064	0.028	2800	18×36	ECR1VHL332M□□180036
<b>50</b> (63) <b>1H</b>	1	132.6	2.5	35	8×11.5	ECR1HHL010M□□080011
	2.2	60.31	1.8	50	8×11.5	ECR1HHL2R2M□□080011
	3.3	40.21	1.3	70	8×11.5	ECR1HHL3R3M□□080011
	4.7	28.23	0.85	100	8×11.5	ECR1HHL4R7M□□080011
	10	13.27	0.60	200	8×11.5	ECR1HHL100M□□080011
	22	6.032	0.35	260	8×11.5	ECR1HHL220M□□080011
	33	4.021	0.28	300	8×11.5	ECR1HHL330M□□080011
	47	2.823	0.28	300	8×11.5	ECR1HHL470M□□080011
	100	1.327	0.18	520	10×12.5	ECR1HHL101M□□100012
	220	0.603	0.082	890	10×20	ECR1HHL221M□□100020
	330	0.402	0.065	1000	12.5×20	ECR1HHL331M□□125020
	470	0.282	0.051	1200	12.5×25	ECR1HHL471M□□125025
	1000	0.133	0.037	2180	16×31.5	ECR1HHL102M□□160031
	2200	0.072	0.029	2800	18×40	ECR1HHL222M□□180040
<b>63</b> (79) <b>1J</b>	33	3.619	0.40	250	8×11.5	ECR1JHL330M□□080011
	47	2.541	0.27	400	10×12.5	ECR1JHL470M□□100012
	100	1.194	0.20	450	10×16	ECR1JHL101M□□100016
	220	0.543	0.10	820	12.5×20	ECR1JHL221M□□125020
	330	0.362	0.072	1000	12.5×25	ECR1JHL331M□□125025
	470	0.254	0.069	1500	16×25	ECR1JHL471M□□160025
	1000	0.119	0.056	1850	16×31.5	ECR1JHL102M□□160031
	1500	0.080	0.043	2350	18×40	ECR1JHL152M□□180040

## Ratings for CD 269L HL Series

U <sub>R</sub> (Surge Voltage) Code	Rated Capacitance	Max ESR 20°C, 120Hz	Max Impedance 20°C, 100kHz	Rated Ripple Current 125°C, 100kHz	Size ΦD×L	P/N
(V)	(μF)	(Ω)	(Ω)	(mA <sub>rms</sub> )	(mm)	-
100 (125) 2A	4.7	22.58	1.3	100	8×11.5	ECR2AHL4R7M□□080011
	10	10.61	1	200	8×11.5	ECR2AHL100M□□080011
	22	4.825	0.67	220	8×11.5	ECR2AHL220M□□080011
	33	3.217	0.45	260	10×12.5	ECR2AHL330M□□100012
	47	2.259	0.33	330	10×16	ECR2AHL470M□□100016
	100	1.062	0.17	670	12.5×20	ECR2AHL101M□□125020
	220	0.483	0.13	1100	16×25	ECR2AHL221M□□160025
	330	0.322	0.10	1300	16×31.5	ECR2AHL331M□□160031
	470	0.226	0.092	1600	18×31.5	ECR2AHL471M□□180031

Customer products are available on request.

## Lifetime Diagram

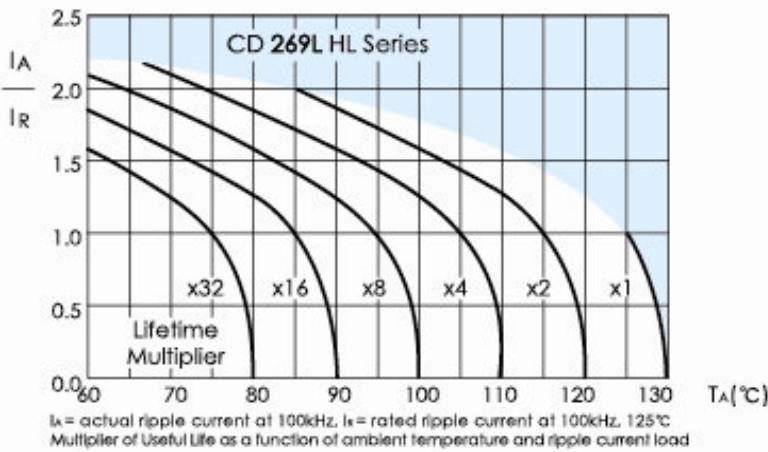

## Typical Curves

