


Specifications

Type		Sin 60x60				
Dimensions (L x W x H)	mm	60 x 60 x 30.2				
Weight	kg	0.5				
Capacitance ($\pm 10\%$)	μF	0.25 μF	0.33 μF	0.66 μF	1.33 μF	2.6 μF
Sinusoidal Voltage	V_{rms}	1000	800	700	650	500
Peak_Voltage	V	1414	1131	990		707
Max. Current	A_{rms}	400	600		850	950
Max. Power	kVA_r	400				
Freq Range @ Half Power	kHz	127-509	150-868	98-434	48-432	49-276


Sin 60x60

Conduction-cooled capacitor


Technology Patented Worldwide

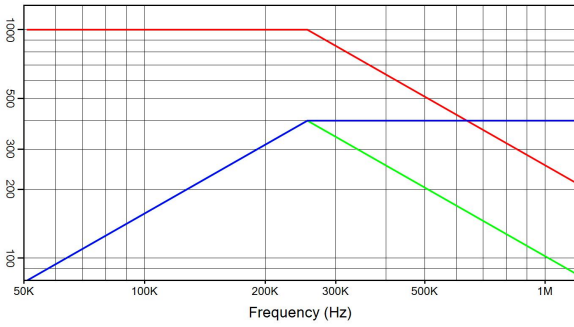


Sin 60x60 0.25 µF 1000 V_{rms} 400 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms} — V_{rms}

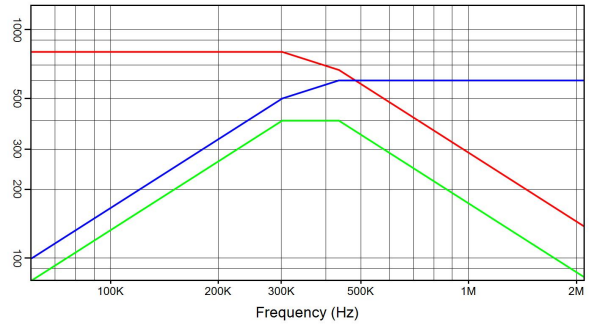


Sin 60x60 0.33 µF 800 V_{rms} 600 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms} — V_{rms}

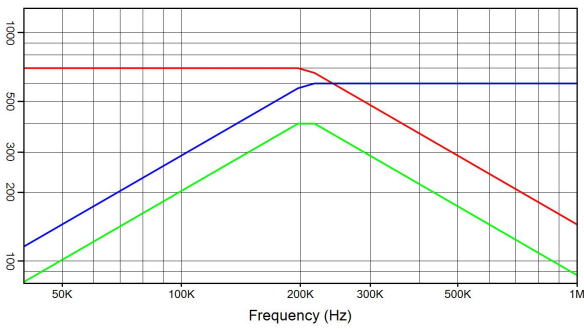

Sin 60x60 0.66 µF 700 V_{rms} 600 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms} — V_{rms}

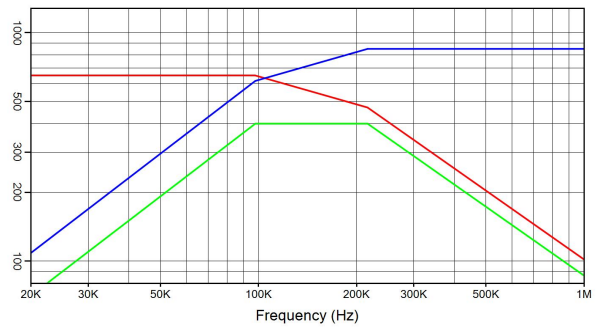

Sin 60x60 1.33 µF 650 V_{rms} 850 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms} — V_{rms}

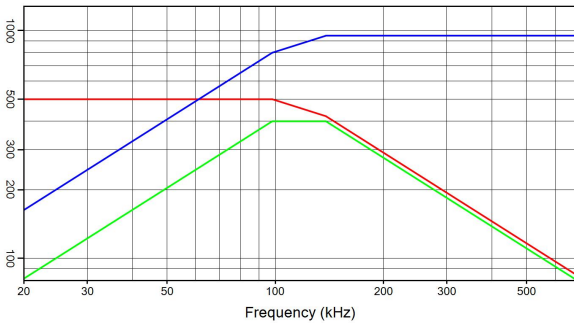

Sin 60x60 2.6 µF 500 V_{rms} 950 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms} — V_{rms}

Celem Power Capacitors

Produced: 27/09/2016